# TOILET FIXTURE - 4685-BAR

Item:_____

Unit may be pictured with some optional features.

**WARNING**: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

**1.28 gpf (4.8 Lpf) Fixtures - 2-3/8" waste connection**

❑ **HET4685-BAR** Top supply connection 1 1/2" (38mm) MIPT.

## STANDARD FEATURES

- **Front mounted fixture, wall outlet waste.**
- **Toilet Bowl-**
  - Elongated.
  - High polished integral seat.
  - Self draining flushing rim.
  - Siphon Jet type trap.
  - Fully enclosed trap.
  - Hinged Seat rated for 1200 lbs.

## ► DESCRIPTION

This Toilet Fixture is designed for bariatric applications without an accessible pipe chase. The fixture is fabricated using heavy gauge type 304 stainless steel, seamlessly welded to form a vandal resistant unit. Internal piping is stainless steel. Exposed surfaces are a satin finish, except for the integral seat which is polished to a bright finish.

## ► PERFORMANCE STANDARDS

Metcraft's standard toilet is a "High Efficiency Toilet" (HET) 1.28 gpf (4.8 lpf) with a 2 3/8" (60mm) waste outlet as an option. Metcraft bowls and assemblies are designed to withstand 5000 lb. (22kN) loading without permanent deflection and damage. This fixture meets or exceeds ASME A112.19.3 / CSA B45.4 standards for "Stainless Steel Plumbing Fixtures". The trap will pass a 2 1/8" (54mm) dia. ball. A minimum 1" (25mm) supply providing 35psi (241kPa) flushing pressure is required.

Listed by

## ► INSTALLATION

The fixtures are supplied with four ¼" (6mm) threaded steel studs and tamper resistant cap nuts to secure fixture to the wall, and a floor clip with two ½" (113mm) bolts to secure to the floor. Integrally welded 5-1/2" (140mm) diameter recessed gasket flange (gasket provided by others). The installer must provide wall openings for piping per rough-in drawings provided by Metcraft. Fixture meets A.D.A. requirements when installed per A.D.A. guidelines.

Water Consumption:
With a HET consumption flush valve - 1.28 gpf (4.8 liters)

| RECOMMENDED FLUSH VALVES | | | |
|---|---|---|---|
| | SLOAN | ZURN | DELANY |
| Exposed HET | 111-1.28 | Z6600-1.28 | - |

# BARIATRIC FIXTURES

## TOILET WASTE

- ❑ **GW** Gasket waste outlet (Standard).
- ❑ **PE** Plain end waste - 4" off fixture.
- ❑ **PL** Plain end waste - 3" into chase.

Wall Thickness:_____

## PRODUCT OPTIONS

- ❑ **MS** High Polished Seat.
- ❑ **HS** Hinged Seat rated for 1200 lbs. (Standard)
- ❑ **HO** Punched for hinged seat (By Others).
- ❑ **PCC** Powder Coat - Anti-microbial White.
- ❑ **BL** Bed Pan Lugs.

## OPTIONAL ACCESSORIES

- ❑ **TSC** Toilet Shipping Cover
- ❑ **A615** Flush Valve Cover.

**Wall Mounted Toilet Paper Holders**

- ❑ **A721** Front Mounted Recessed Toilet Paper Holder.
- ❑ **A722** Ligature Resistant Front Mounted Recessed Toilet Paper Holder.

## TOILET FIXTURE - 4685-BAR

**Item:**_____

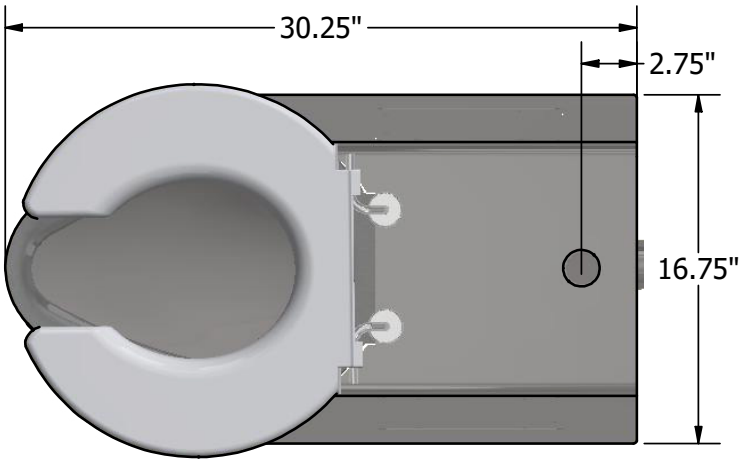


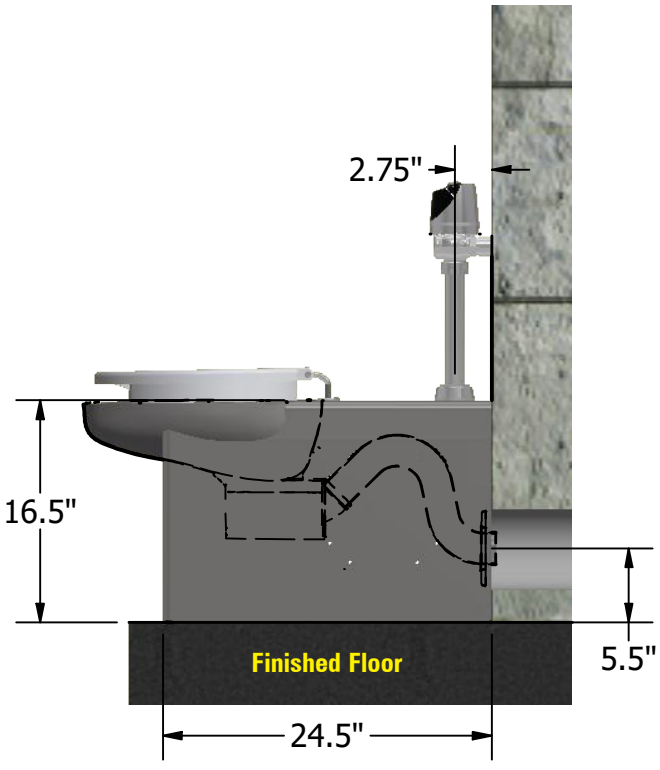


Due to continuous product improvement Metcraft reserves the right to make changes in design and specifications without prior notice. All dimensions should be verified with the factory for current information.

| APPROVED FOR MANUFACTURING | Company:_____ Name:_____ |
|---|---|
| | Signature:_____ Date:_____ |


2901 NE Hagan Road - Lee's Summit, MO 64064 ❖ 816-554-0300 ❖ sales@metcraftindustries.com ❖ www.metcraftindustries.com

**LinkedIn:** linkedin.metcraft.pro ❖ **YouTube:** youtube.metcraft.pro ❖ **Instagram:** instagram.com/Metcraft_Ind/ ❖ **Twitter:** https://twitter.com/MetcraftInd