


**SHOWER FIXTURE - 8125 LR**

Item: \_\_\_\_\_

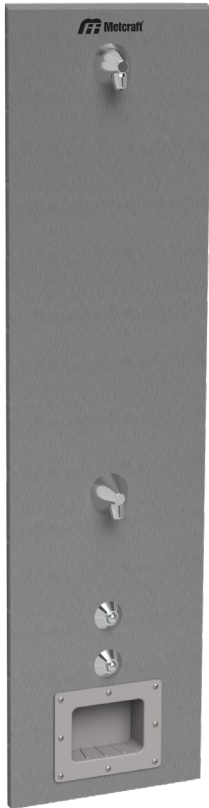

Unit may be pictured with some optional features.

 **8125 LR**

Chase Mounted Shower Fixture.

**STANDARD FEATURES**

- **Chase mounted fixture**
- 17½ degree conical shower heads with vandal resistant adjustable spray. Second conical shower head mounted at 48" (1219mm) above finished floor satisfies "A.D.A." requirements in lieu of hand shower.
- Recessed soap dish
- Single temperature pushbutton pneumatic metering valve manifold serves two shower heads independently. One pushbutton operates upper shower head and another operates the lower shower head.
- 2.5 gallon per minute flow.
- Ligature resistant push buttons.
- **Hardware-**
  - Plated steel anchor rods with washers and hex nuts.

**WARNING:** Cancer and Reproductive Harm  
- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Fixture designed to reduce possible ligature points. Not a substitute for professional supervision.

**► DESCRIPTION**

This Shower Panel Fixture is designed for areas with an accessible pipe chase. The panel is fabricated using heavy gauge type 304 stainless steel. Exposed surfaces are polished to a satin finish. Panel is secured to the wall using concealed anchor rods, washers and hex nuts from the chase side. All trim is secured to the panel from the back side.

**► PERFORMANCE STANDARDS**

This fixture meets or exceeds ASME A112.19.3 / CSA B45.4 standards for "Stainless Steel Plumbing Fixtures".

**► INSTALLATION**

Anchor rods screw into sockets on back of the shower panel and are then passed through the wall. The panel is secured in place using washers and hex nuts from the chase side of the wall. The valve should be installed in the pipe chase no more than 7' away from the fixture. Fixture meets A.D.A. requirements when installed per A.D.A. guidelines.

NOTE: A security frame (wall sleeve) is recommended when installed on a new block (CMU) or poured concrete wall.

Listed by

**CAPE COD SYSTEMS CORPORATION****TEL. 1-888-227-8555****[www.capecodsystems.com](http://www.capecodsystems.com)**

**WALL THICKNESS AND TYPE (Must Specify)**

 Thickness: \_\_\_\_\_ Type:  Concrete  Block  Steel

**SHOWERHEADS -ABLE BODIED**

- PSH-1C Conical Shower Head 30 dg.
- PSH-2C Conical Shower Head 17.5 dg.

**SHOWERHEADS -ADA**

- PSH-1C Conical Shower Head 30 dg.
- PSH-2C Conical Shower Head 17.5 dg.

**SOAP DISHES**

- SO Recessed Soap Dish. (Standard)
- NSO No Soap Dish Option.

**VALVE ASSEMBLIES WITH HEMI PUSHBUTTON**

- A313 Single Temperature, Manifolder Valve.
- A314 Dual Temperature, Manifolder Valve.

**FLOW CONTROLS**

- FC12 1.2 gallon per minute flow.
- FC14 1.4 gallon per minute flow.
- FC20 2.0 gallon per minute flow
- FC25 2.5 gallon per minute flow



**OPTIONS/ACCESSORIES**

- A120 Security Frame (Wall Sleeve/Can).

**CAPE COD SYSTEMS CORPORATION**  
**TEL. 1-888-227-8555**  
**www.capecodsystems.com**

**SHOWER FIXTURES - 8125 LR**

Item: \_\_\_\_\_

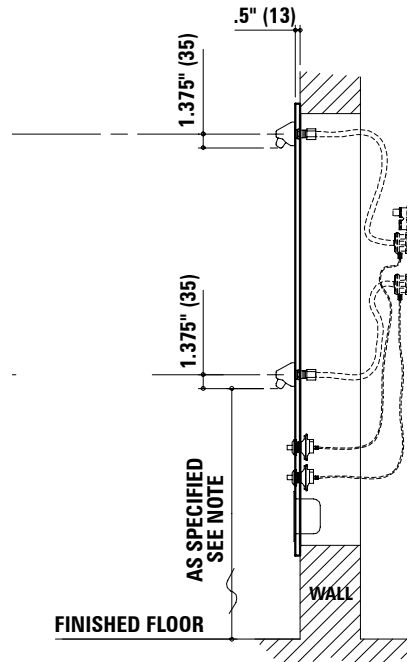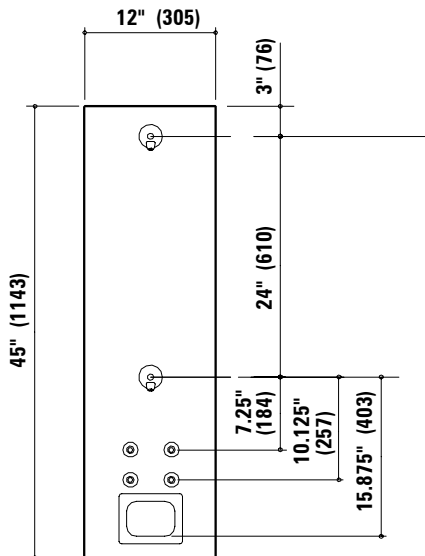

Due to continuous product improvement Metcraft reserves the right to make changes in design and specifications without prior notice. All dimensions should be verified with the factory for current information.

<b>APPROVED FOR MANUFACTURING</b>	Company: _____	Name: _____	
	Signature: _____	Date: _____	