

# CAPE COD SYSTEMS CORPORATION TEL. 1-888-227-8555

6563

**Soap Dispenser** 

▼ Tank Type Vertical

**Bradex®** 

Surface-Mounted

ADA Compliant

#### **Product Materials**

**BODY:** 20 gauge stainless steel with exposed surfaces in architectural satin finish.

**BACK:** 20 gauge stainless steel; heliarc welded to the body.

WALL PLATE: stainless steel.


**SOAP VALVE:** black ABS plastic mechanism.

## Capacity

40-oz. liquid soap.

## **Operation**

Push-in valve dispenses measured amount of vegetable or coconut oil liquid soaps, synthetic detergents, and antiseptic solutions with less than 5 lbs. of force. Sight gauge indicates refill time. Locked filler top opens with special key provided.



#### Installation

Verify all rough-in dimensions prior to installation. Secure separate mounting bracket to wall. Slide dispenser into place and secure locking screw through filler hole.

### **Guide Specification**

Surface-mounted liquid soap dispenser shall be fabricated of 20 gauge satin finish stainless steel. Dispenser shall have completely concealed mounting, vandal-resistant filler hole cover and sight gauge. Push-in corrosion-resistant liquid soap valve. Capacity: 40-oz. liquid soap. Requires less than 5 lbs. of force to dispense soap.

Overall dimensions: 4-13/16"W x 8-3/16"H x 2-7/8"D.

#### **Service Kit**


Soap Valve - P15-449



## ADA Compliant

- Consult local and national accessibility codes for proper installation guidelines.
- Conformity and compliance to local and national codes is the responsibility of the installer.



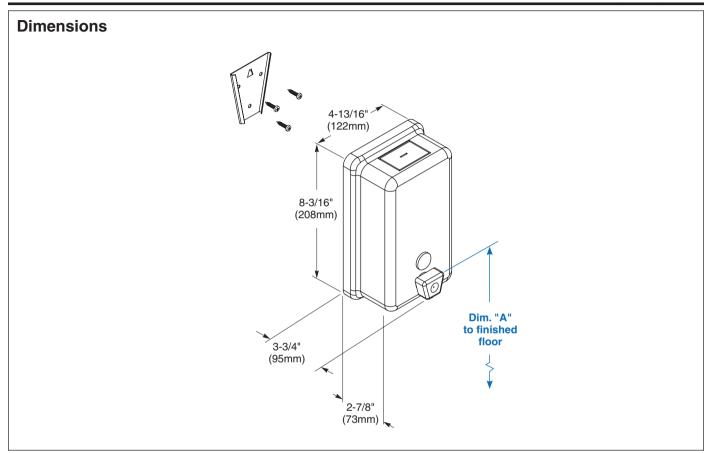

Dim. "A" Key Surface:	For Dim. "A"	Top of Unit	Bottom of Unit
Push button top to finished floor	40" (1016mm)	46¼" (1175mm)	38" (965mm)
	38" (965mm)	44¼" (1124mm)	36" (914mm)
	36" (914mm)	42¼" (1073mm)	34" (864mm)
	34" (864mm)	40¼" (1022mm)	32" (813mm)
Rough wall opening:			
Surface Mount:	No rough wall opening, see overall dimensions		