

HNL STEP LIGHT SERIES: QUICK SHIP

HNLHH/HNLOF/HNLVH

FEATURES:

- Intended for Healthcare Settings, Patient Rooms, Surgical Suites, Commercial Settings, Lobbies, Schools, and more
- 5 Day Quick Ship for orders under 50 fixtures. Consult factory for large quantities or additional fixture options
- Three faceplate options: horizontal or vertical hood, and open frame
- Manufactured in durable die cast aluminum
- Available in 3000°K, 4000°K, 5000°K and Amber



RELATED PRODUCTS:

- [HNL Step Light Full Range of Ordering Options](#)
- [StarStep SNL3](#)

HNLHH



SPECIFICATIONS

CONSTRUCTION: Durable die cast aluminum material. Available with three different faceplates: Horizontal Hood, Open Frame (can be installed vertically or horizontally), and Vertical Hood.

LED: Available in three white color temperatures 3000°K, 4000°K and 5000°K. Optional amber LED.

ELECTRICAL: Integrated embedded driver (3W). Optional dimming.

FINISH: White antimicrobial finish (standard).

INSTALLATION: Recessed installation. JBox and hardware by others.

WARRANTY: Limited five (5) year warranty.

LABEL: Fixture is certified to UL standards for Wet Location rating (under covered ceiling).

CAPE COD SYSTEMS CORPORATION

TEL. 1-888-227-8555

www.capecodsystems.com

HNL STEP LIGHT SERIES: QUICK SHIP

HNLHH/HNLOF/HNLVH

ORDERING INFORMATION

EXAMPLE: HNL-HH-30-UN-NF-DM-AM-QS

SERIES	FACEPLATE	COLOR TEMP.	VOLTAGE	OPTIONS
HNL			UN	NF

HH = Horizontal Hood

OF = Open Frame*

VH = Vertical Hood

30 = 3000°K

40 = 4000°K

50 = 5000°K

LA = Amber LED

UN = Universal
(120V-277V)

NF = None

* Can be installed horizontally or vertically.

DIMMING	FINISH	
	AM	QS

ND = None

AM = Antimicrobial White

QS = Quick Ship

DM = 0-10V dimming with 10-100% range


PERFORMANCE DATA*

*Data is with 80 CRI chip. LEDs are frequently updated therefore values may change without notice.


MODEL	COLOR TEMP.	LUMENS DELIVERED	EFFICACY (lm/W)	INPUT POWER (W)
HNL-OF	3000°K	250	66	3.8
	4000°K	240	63	3.8
	5000°K	253	67	3.8
	Amber LED	170	45	3.8
HNL-VH	3000°K	92	24	3.8
	4000°K	82	22	3.8
	5000°K	95	25	3.8
	Amber LED	61	16	3.8
HNL-HH	3000°K	130	34	3.8
	4000°K	120	32	3.8
	5000°K	133	35	3.8
	Amber LED	88	23	3.8

DIMENSIONAL DATA

HORIZONTAL HOOD

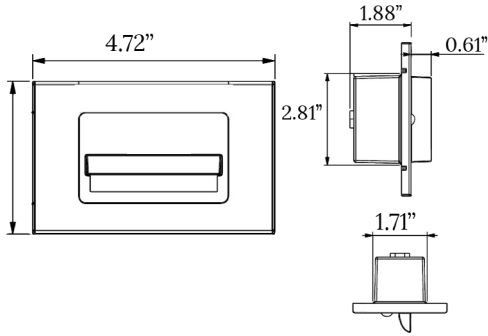

VERTICAL HOOD

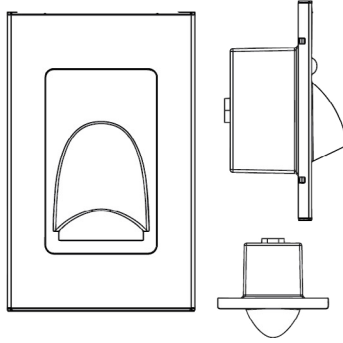

OPEN FRAME
(VERTICAL OR HORIZONTAL)

