CAPE COD SYSTEMS CORPORATION
TEL. 1-888-227-8555

Division of Acorn Engineering Company®

A MEMBER OF MORRIS GROUP INTERNATIONAL

Whitehall Ligature Resistant Siphon Jet Toilet (With Flush Valve Cover Provided Separately)

Model WH2142-ADA-T-EGE10
(Top Supply)

Ligature Resistant Siphon Jet Toilet - ADA 2010 Compliant

Ligature Resistant Siphon Jet Toilet is arranged to be installed on a finished wall from the front side with a fixture-to-wall mounting channel. Unit is fabricated from 16 gage, type 304 stainless steel and is seamless welded construction with exterior surfaces powder coated white (interior of toilet will have a satin finish and will not be powder coated). Toilet will be provided with WH-LRSC-GRAY Ligature Resistant ABS Toilet Seat Cover.

Toilet is siphon jet type with an elongated bowl manufactured to comply with ASME A112.19.3, CSA B45.4 and 2010 ADA Standards for Accessible Design. Toilet requires a minimum of 25 PSI flow pressure and uses a minimum water consumption of 1.28 GPF. On-floor units can withstand load rating of 5000 lbs. without permanent damage. Trap has a minimum 3-1/2" seal, will pass a 2-1/8" ball and is fully enclosed. Toilet has a 1-1/2" NPT flushing inlet connection. Wall waste outlet connection is a 5-1/2" gasket flange. Floor waste outlet locations rear of fixture are 10" or 12" with a 7-1/2" gasket flange.

Optional Hydraulic Flush Valve is a exposed type with cast bronze body. Flush valve features quiet operation and includes a suicide resistant pushbutton, union angle stop and vacuum breaker. All exposed parts are chrome plated.

Optional Flush Valve Cover is 16 gage, type 304 stainless steel with all exposed surfaces powder coated white. It is furnished with six removable wall brackets secured with vandal resistant screws. Refer to WH2802SLPT-ADA submittal for additional information.

GUIDE SPECIFICATION

Provide and install Whitehall Best-Care™ Ligature Resistant ADA 2010 Compliant Toilet (specify model number and options). Fixture shall be fabricated from 16 gage, type 304 stainless steel. On-floor units can withstand load rating of 5000 lbs. without permanent damage. Construction shall be seamless welded and exterior surfaces are powder coated white. Housing to include side access panels. Toilet shall be concealed siphon jet type with an elongated bowl and self-draining flushing rim. Toilet shall be ASME A112.19.3, CSA B45.4, and ADA 2010 compliant. Toilet requires a minimum of 25 PSI flow pressure and uses a minimum water consumption of 1.28 GPF. Toilet trap shall have a minimum 3-1/2" seal and shall pass a 2-1/8" diameter ball and is fully enclosed. Provided with WH-LRSC-GRAY Whitehall Ligature Resistant ABS Toilet Seat Cover.

- **Patented US 10,052,000 B2**

*Please visit **www.whitehallmfg.com** for most current specifications.*

Member of U.S. Green Building Council

Recyclable Product

Water Conserving Product

Complies with the following standards:

GREEN UPC Water Efficiency

WaterSense Meets EPA Criteria Certified by IAPMO R&T

MODEL AND OPTIONS SELECTION

BASE MODEL NUMBER

- ❑ WH2142-ADA-T-2-EGE10 — Wall Outlet, Siphon Jet Toilet
- ❑ WH2142-ADA-T-3-EGE10_10 — Floor Outlet, Siphon Jet Toilet, (10" rough-in from wall to the center of waste outlet)
- ❑ WH2142-ADA-T-3-EGE10_12 — Floor Outlet, Siphon Jet Toilet, (12" rough-in from wall to the center of waste outlet)

Optional Flush Valve Cover w/ Flush Valve:

- ❑ WH2802SLPT-ADA-EG10-1.28 — Ligature Resistant Flush Valve ADA Cover (White) w/ 1.28 GPF Hydraulic Flush Valve
- ❑ WH2802SLPT-ADA-EG10-1.6 — Ligature Resistant Flush Valve ADA Cover (White) w/ 1.6 GPF Hydraulic Flush Valve

Accessories:

Note: Gray Ligature Resistant Seat Cover is Standard

- ❑ WH-LRSC-WHITE — Ligature Resistant Seat Cover, White (Shipped Loose)
- ❑ WH-LRSC-BLACK — Ligature Resistant Seat Cover, Black (Shipped Loose)
- ❑ WH-LRSC-BLUE — Ligature Resistant Seat Cover, Dignity Blue (Shipped Loose)

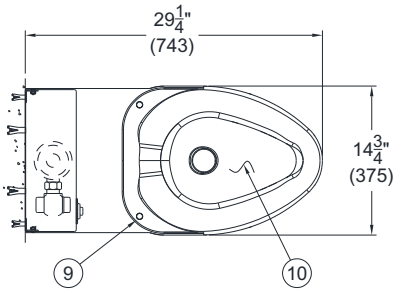

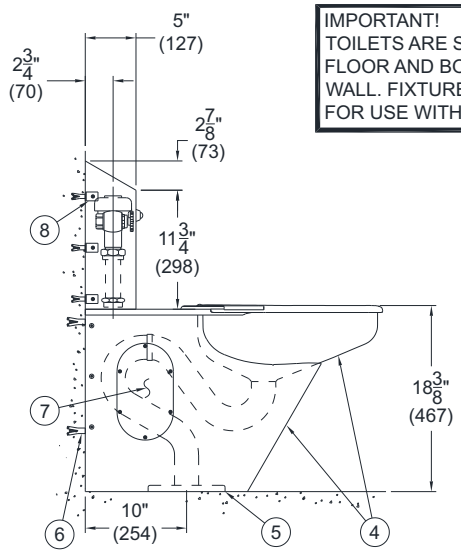

MODEL# WH2142-ADA-T-3_10-WH2802SLPT SHOWN

IMPORTANT!
TOILETS ARE SUPPORTED ON THE FLOOR AND BOLT TO REINFORCED WALL. FIXTURES ARE NOT INTENDED FOR USE WITH TOILET CARRIERS.

NOTES:

1. OPTIONAL FLUSH VALVE COVER WITH FLUSH VALVE
2. HYDRAULIC FLUSH VALVE PUSHBUTTON
3. VANDAL RESISTANT FASTENERS
4. EXTERIOR SURFACES POWDER COATED WHITE
5. TOILET FLOOR WASTE OUTLET SHOWN
6. WALL ANCHORS AND ANCHORING HARDWARE BY OTHERS
7. ACCESS PANEL, BOTH SIDES
8. L-CLIPS FOR WALL MOUNTING
9. WH-LRSC-GRAY WHITEHALL LIGATURE RESISTANT ABS TOILET SEAT COVER
10. INTERIOR OF TOILET w/ SATIN FINISH (NOT POWDER COATED)

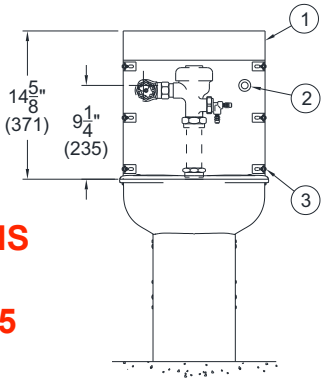

CAPE COD SYSTEMS CORPORATION
TEL. 1-888-227-8555

DISCLAIMER:
This product is designed to decrease the probability that it may be utilized as an apparatus for ligature. It is not a replacement for professionals who are trained in the proper evaluation, management and supervision of persons at risk of suicide.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility for use of void or superseded data © Whitehall Manufacturing, Member of Morris Group International.
Please visit ***www.whitehallmfg.com*** for most current specifications.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options_____Quantity_____
Company_____Date_____
Contact_____Title_____
Approval for Manufacturing/Signature_____