Cape Cod Systems
888-227-8555
www.capecodsystems.com

Division of Acorn Engineering Company®

A MEMBER OF MORRIS GROUP INTERNATIONAL

Whitehall Ligature Resistant Faucet with pushbuttons and Valve

Model WH3376
& WH3377

**U.S. DESIGN PATENTED

WH3377

Fixture May Show Some Available Options

Ligature Resistant Faucet

The Ligature Resistant Faucet is designed and developed to retrofit existing lavatories or it can be specified for new design. The Ligature Resistant Faucet is arranged to be mounted to the deck of the lavatory. Faucet assembly requires (3) 1-5/16" to 1-1/2" diameter holes on 4" or optional 8" centerset. Conical faucet is 303 stainless steel and provides vandal and suicide resistance. Includes a 0.35 GPM vandal resistant flow nozzle.

Valve is an Air-Control pneumatically operated, pushbutton valve using atmospheric air. Hemispherical pushbuttons are vandal resistant and require less than 5 pounds of force to activate valve. Valve is metering with non-hold open feature. Metering valve timing range is 0-60 seconds. Valve can be remotely located up to 10 feet from the operating pushbutton.

Optional WHST70-12 Mixing Valve option delivers tempered water flow by compensating for pressure and temperature fluctuations. Valve is to be field set to 105 Fahrenheit and includes strainers and integral checks. Operating range is 30 to 100 PSI.

Fixture is ADA Compliant. Unit conforms with ADA requirements for accessibility when installed correctly. Compliance is subject to the interpretation and requirements of the local code authority.

GUIDE SPECIFICATION

Provide and install Ligature Resistant Faucet assembly (specify model number and options). Faucet escutcheon shall be fabricated from 14 gage type 304 stainless steel and shall have a satin finish. Faucet valve shall be Air-Control, metering, non-hold open type. Assembly shall include 0.35 GPM vandal resistant flow control nozzle, hot and cold hemispherical pushbuttons, pushbutton sleeve and faucet connections.

*Please visit **www.whitehallmfg.com** for most current specifications.*

Member of U.S. Green Building Council

Recyclable Product

Water Conserving Product

Complies with the following standards:

Federal Public Law 111-380 (No Lead)

MODEL NUMBER AND OPTIONS SELECTION:

BASE MODEL NUMBER

❑ WH3376	Ligature Resistant Faucet with Air-Control Valve Assembly, Single Temp with 4" Centerset
❑ WH3377	Ligature Resistant Faucet with Air-Control Valve Assembly, Hot & Cold with 4" Centerset
❑ WH3376-8IN	Ligature Resistant Faucet with Air-Control Valve Assembly, Single Temp with 8" Centerset
❑ WH3377-8IN	Ligature Resistant Faucet with Air-Control Valve Assembly, Hot & Cold with 8" Centerset

OPTIONS:

❑ WHST70-12	ASSE 1070 Compliant Hot & Cold, Temperature / Pressure Balancing Mixing Valve

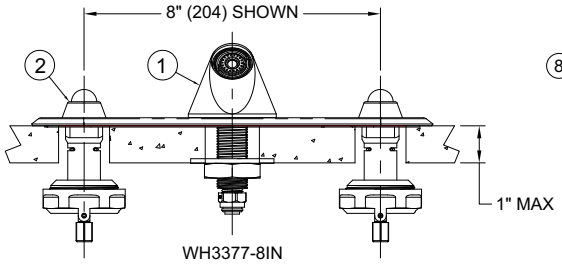

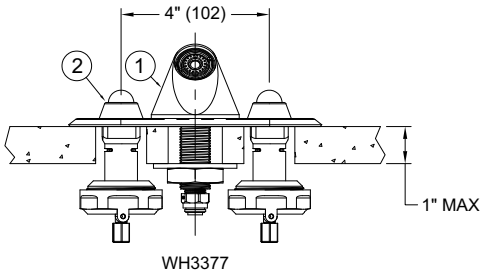

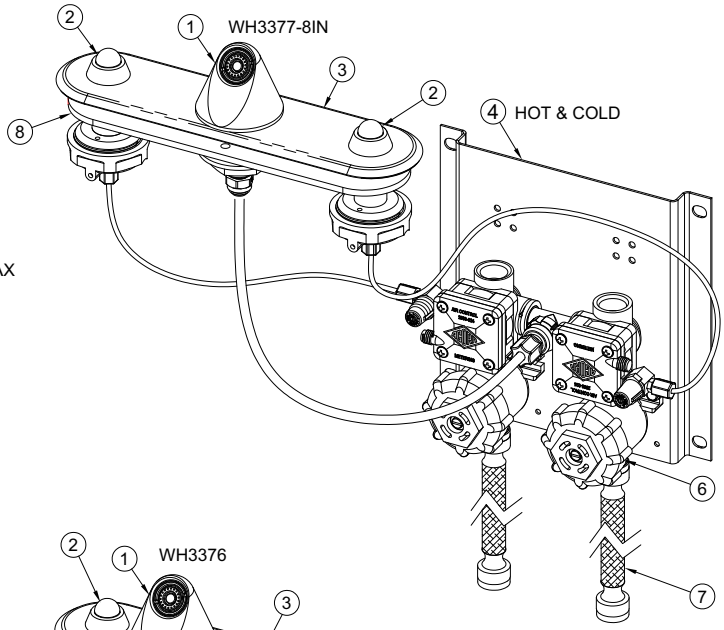

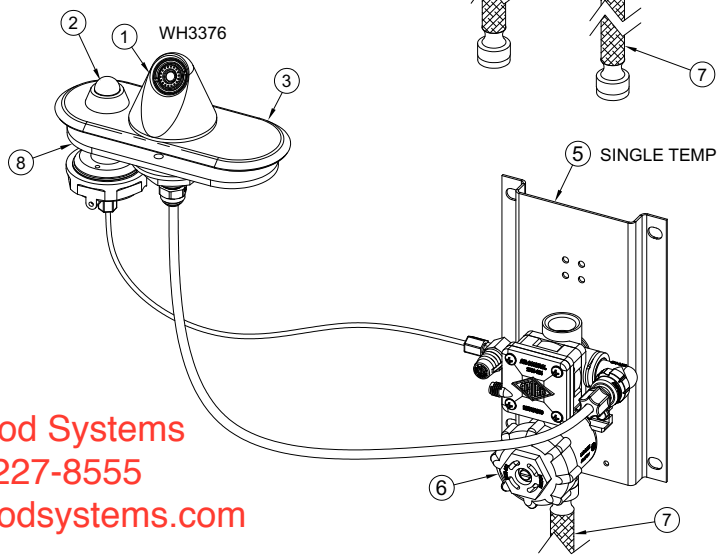

NOTES:

1. CONICAL LIGATURE RESISTANT SPOUT WITH A 0.35 GPM VANDEL RESISTANT NOZZLE
2. LIGATURE RESISTANT HEMISPHERICAL PUSHBUTTONS
3. ESCUTCHEON PLATE
4. AIR-CONTROL VALVE ASSEMBLY, HOT AND COLD
5. AIR-CONTROL VALVE ASSEMBLY, SINGLE TEMPERATURE
6. CHECKSTOP/STRAINER ASSEMBLY
7. 1/2" NPS INLET FLEX HOSE
8. GASKET

Cape Cod Systems
888-227-8555
www.capecodsystems.com

DISCLAIMER:
This product is designed to decrease the probability that it may be utilized as an apparatus for ligature. It is not a replacement for professionals who are trained in the proper evaluation, management and supervision of persons at risk of suicide.

All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility for use of void or superseded data. Whitehall Manufacturing®, Member of Morris Group International. Please visit ***www.whitehallmfg.com*** for most current specifications.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options_____Quantity_____
Company_____Date_____
Contact_____Title_____
Approval for Manufacturing/Signature_____