CAPE COD SYSTEMS CORPORATION
TEL. 1-888-227-8555

Division of Acorn Engineering Company®

A MEMBER OF MORRIS GROUP INTERNATIONAL

APPLICATION: SHOWER VALVE

The Whitehall WHSV16 ASSE 1016 ***(Rev. 2011)*** Certified Temperature/Pressure (T/P) compensating Shower Valve meets the requirements of any shower or tub/shower application where uncompromised bather safety and comfort is required. Although designed and built for the challenges of commercial and industrial facilities, it is cost competitive with high-end Pressure Balancing valves. The WHSV16 combination T/P valve allows even the most cost sensitive properties to meet budget without the scalding risk associated with type "P" valves.

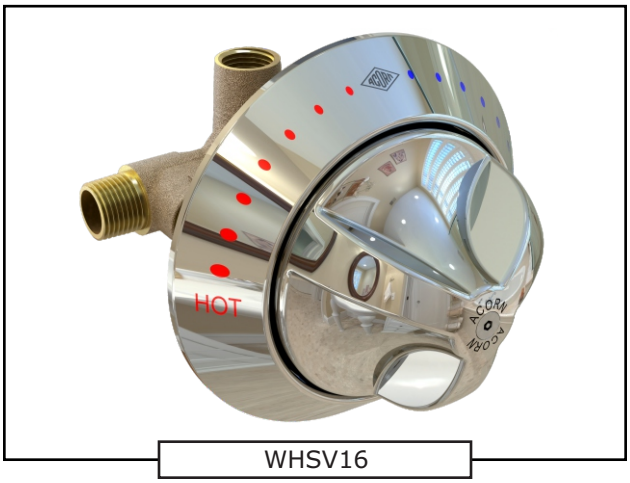

WHSV16

US PATENTS - US 10,474,170 B2 & US D697,591

FEATURES:

- IAPMO certified at 1.25 GPM (4.7 LPM) control accuracy requirements of ASSE 1016 T/P
- Ceramic shut-off components for long-term, drip-free reliability
- ✧ Lead-Free certified DZR brass body with corrosion resistant and lead-free internal components
- A self-contained, field reversible cartridge eliminates cross- piping and offsetting of valves in back-to-back type installation
- Commercial quality paraffin sensor provides repeatable, reliable performance
- Integral checkstops to isolate individual valves for servicing and to prevent backflow
- A non-rising stem insures the benefit of our patented Ligature Resistant trim even when full open
- Our patented Tri-Lever Ligature Resistant Handle is all-metal and provides ADA Compliance throughout the full operating range
- Serviceable inlet screens

SPECIFICATIONS:

Connections: ..... Combination 1/2" NPT and 1/2" solder Inlet Connections

Riser Connection: ..... 1/2" NPT

Flow Rate: ..... 4 GPM (15 LPM) @ 45 PSI (310 kPa) Differential

Hot Water Supply Temp.: ..... 110°F-180°F (43°C-82°C)

Cold Water Supply Temp.: ..... 35°F-80°F (1.7°C-27°C)

Approach Temperature*: ..... 5°F (2.8°C) Above Set Point

Maximum Operating Pressure: ..... 125 PSI (862 kPa)

Temperature Ranges*: ..... 85°F-115°F (29°C-46°C)

Certified Minimum Flow: ..... 1.25 GPM (4.7 LPM)

PRESSURE DROP PSID (kPa)	Cv	5 (34)	10 (69)	15 (103)	20 (138)	30 (207)	45 (310)	60 (414)
FLOW RATE GPM (LPM)	0.6	1.3 (5)	1.9 (7.1)	2.3 (8.7)	2.7 (10)	3.3 (12.4)	4 (15.1)	4.6 (17.5)

** Under normal operating conditions.*

✧ The wetted surface of these valves contacted by consumable water contains less than 0.25% of lead by weight in conformance with national lead-free law.

GUIDE SPECIFICATION:

WHSV16 Shower valve shall meet performance requirements of ***ASSE 1016-2011***, Type T/P, compensating for ±50% fluctuation in supply line pressure and compensate for increases in hot water supply temperature. Valve shall operate with a non-rising stem and have ceramic shut-offs for long term drip-free reliability. Cartridge shall be self-contained, designed for easy maintenance and repair. Valve shall be a cast brass body with a capacity of 4 GPM (15 LPM) at 45 PSI (310 kPa) differential. Valve shall include a field adjustable limit stop, factory set at 110°F (43°C) and capable of supplying mixed water temperature within 5°F (2.8°C) of hot water supply temperature. Valve shall always open through cold water to maximize the safety of the bather.

Member of U.S. Green Building Council

Recyclable Product

Water Conserving Product

CAPE COD SYSTEMS CORPORATION
TEL. 1-888-227-8555
www.capecodsystems.com

*Please visit **www.whitehallmfg.com** for most current specifications.*

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Complies with the following standards: Pb Federal Public Law 111-380 (No Lead)

ASSE 1016 CSA B125.16